

# SOLSTICE

## PREMIUM HIGH EFFICIENCY LED POST TOP LIGHT

# VALO

### VALO SOLSTICE - 40W / 60W / 75W / 100W


WALK THIS WAY.

Total Power Consumption:	40W / 60W / 75W / 100W
LED Type:	VALO Specified Nichia or Cree
CCT:	5000K (4000K Optional)
Efficiency:	120LM/W
Lumens ( $\pm 5\%$ ):	4800LM / 7200LM / 9000LM / 12000LM
Beam Type:	40W - TYPE III (R01203) 60W - TYPE IV (R01204) 75W - TYPE V (R01201)
RA:	Ra70 (Ra80 Optional)
Life Expectancy:	50,000hr
Dimmable:	Optional
Frame Finishes:	Powder Coating
Measurements:	450 x 450 x 526mm
Luminaire Net Weight:	40W - 7.05 $\pm$ 0.2kg 60W - 7.12 $\pm$ 0.2kg 75W - 7.22 $\pm$ 0.2kg 100W - 7.42 $\pm$ 0.2kg
Driver Type:	Constant Current
Input Voltage:	100-240VAC/100 - 277VAC
Power Factor:	>0.9 at Max Load
Frequency:	50 / 60 Hz
Operating Temperature:	-30°C ~ +50°C

Line-Line 6KV,  
Line-PG 10KV

10 Year Limited Warranty

IP66

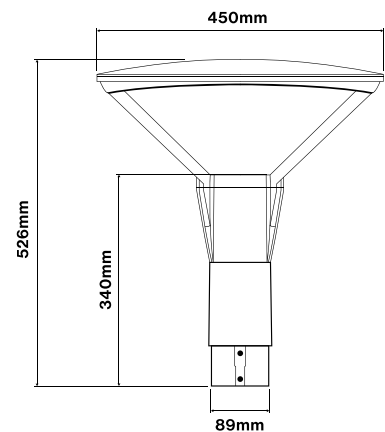

**VALO**  
Premium LED Post Top Light  
valo.com.au

Technical Region: 240V/50Hz  
We reserve the right to make  
technical and design changes  
Edition 06.01.2020

