

DALI SYSTEM CONTROL WALL SWITCH

CONTROL WALL SWITCH

VALO

VALO DALI SYSTEM CONTROL WALL SWITCH

The wall-mounting switch controls each product through communication with the built-in wireless node (ZB Node) and can support both local and central controls.

Model Name:	IPC-1Z / 2Z / 3Z
Total Power Consumption:	MAX 1W
Communication Method:	RS-485 / Wireless
Data Rate:	115,200[bps], 8-N-1 / Wireless 250kbps
Application:	Industrial High Bay, Sports Lighting, Flood Light
Measurements:	105mm x 265mm x 100mm
Weight:	0.95kg



Input Voltage:	AC 100-240V
Operating Temperature:	-20° ~ +60°C

10 Year Limited Warranty

Model Name:	IPC-6Z
Total Power Consumption:	MAX 1W
Communication Method:	RS-485 / Wireless
Data Rate:	115,200[bps], 8-N-1 / Wireless 250kbps
Application:	Industrial High Bay, Sports Lighting, Flood Light
Measurements:	180mm x 305mm x 100mm
Weight:	1.5kg

Input Voltage:	AC 100-240V
Operating Temperature:	-20° ~ +60°C

10 Year Limited Warranty

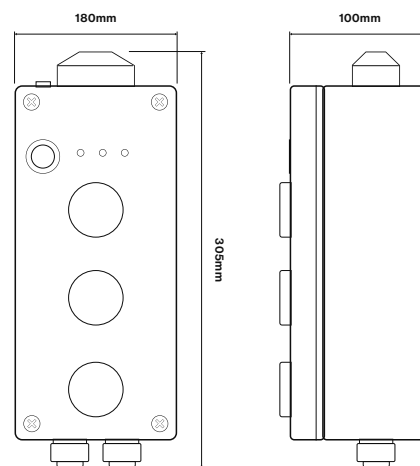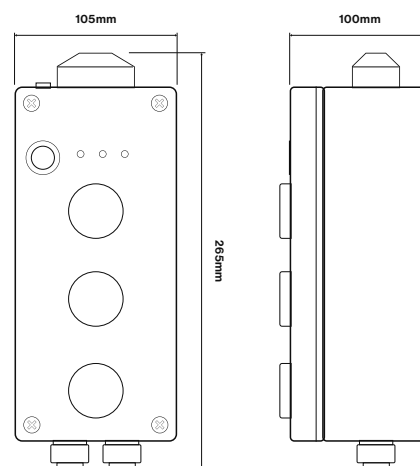

VALO

DALI System Control Wall Switch
valo.com.au

Technical Region: 240V/50Hz
VALO reserves the right to make
technical and design changes
Edition 06.01.2020