

# SOLSTICE

## PREMIUM HIGH EFFICIENCY LED POST TOP LIGHT

# VALO

### VALO SOLSTICE - 40W / 60W / 75W / 100W


WALK THIS WAY.

|                          |   |
|--------------------------|---|
| Total Power Consumption: | 40W / 60W / 75W / 100W  |
| LED Type:                | VALO Specified Nichia or Cree   |
| CCT:                     | 5000K (4000K Optional)  |
| Efficiency:              | 120LM/W   |
| Lumens ( $\pm 5\%$ ):    | 4800LM / 7200LM /<br>9000LM / 12000LM   |
| Beam Type:               | 40W - TYPE III (R01203)<br>60W - TYPE IV (R01204)<br>75W - TYPE V (R01201)                            |
| RA:                      | Ra70 (Ra80 Optional)  |
| Life Expectancy:         | 50,000hr  |
| Dimmable:                | Optional  |
| Frame Finishes:          | Powder Coating  |
| Measurements:            | 450mm x 450mm x 526mm   |
| Luminaire Net Weight:    | 40W - 7.05 $\pm$ 0.2kg<br>60W - 7.12 $\pm$ 0.2kg<br>75W - 7.22 $\pm$ 0.2kg<br>100W - 7.42 $\pm$ 0.2kg |
| Driver Type:             | Constant Current  |
| Input Voltage:           | 100-240VAC/100 - 277VAC   |
| Power Factor:            | >0.9 at Max Load  |
| Frequency:               | 50 / 60 Hz  |
| Operating Temperature:   | -30°C ~ +50°C   |

Line-Line 6KV,  
Line-PG 10KV

10 Year Limited Warranty

IP66

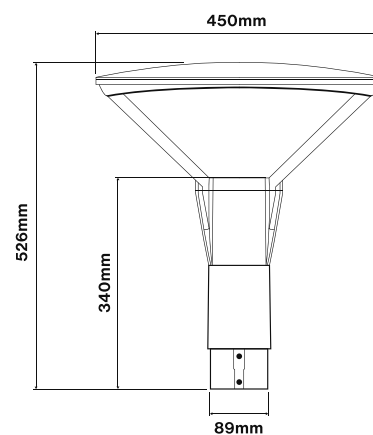

**VALO**  
Premium LED Post Top Light  
valo.com.au

Technical Region: 240V/50Hz  
VALO reserves the right to make  
technical and design changes  
Edition 06.01.2020

